

Altus® 40 RTS

All the advantages of Radio Technology Somfy® (RTS) in 40mm



Radio Technology Somfy (RTS) allows for wireless radio control of motorized window coverings via the RTS family of controls.





Power, Simplicity, and Convenience – The NEW Altus 40 RTS motor is the latest addition to Somfy's Radio Technology Somfy® (RTS) motor offering. The Altus 40 RTS features an integrated radio receiver within the motor which eliminate any wiring between the motor and controls – installations are now quick and easy.

Available in two torques 4Nm and 9Nm, the Altus 40 RTS is ideal for both interior and exterior applications. It is compatible with Somfy's full line of RTS controls and accessories including Telis handheld remotes, DecoFlex WireFree™ wall switches, timers, and WireFree™ sensors.

Altus® 40 RTS

404S2 1001642

409R2 1001643

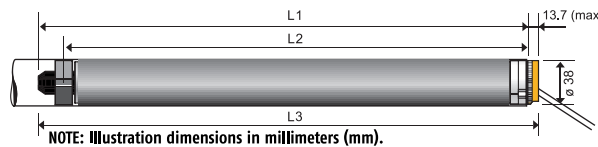

2 holes for self tapping mounting screws (diameter: 4mm, depth: 9.4 mm)

Self tapping mounting screws are included with each motor.

Technical features

Characteristics

Voltage Supply	AC
Index protection rating (exterior use)	IP 44
Limit switch type	Electronic (RTS)
Limit Switch Capacity (limited to 3 minutes of rotation without stop)	250 Turns
Temperature working range	14°F to 104°F (-10°C to 40°C)
Insulation class	Class 1 for 120 V

Performances 404S2 409R2

Torque	4 Nm	9 Nm
Nominal Voltage	120 V / 60 Hz	
Rated Current	.95 A	1.15 A
Speed	36 rpm	16 rpm
Thermal Protection	5 minutes	
Radio Frequency	433.42 MHz	
Sound Level	59 dBA	

Dimensions 404S2/409R2

L1	19.57 in. (497 mm)
L2	18.62 in. (473 mm)
L3	20.08 in. (510 mm)
Cable Length	23 ft. (7m)

Type of cable (hard wired non-removable)

RTS
120 V / 60 Hz
3 conductor cable



white = neutral
black = live
green = ground

SOMFY SYSTEMS INC
121 Herrod Blvd.
Dayton, NJ 08810
Phone: 1-800-22-SOMFY
NJ: (609) 395-1300
Fax: (609) 495-8118